



Non-Optical Cryostat - Economy

The **CS202*E-DMX-3AL** offers a wide range of flexibility at a low cost, making it an excellent choice for most sample and device testing. This system is well suited for Electrical, and Magnetic sample testing. The vacuum shroud allows for a large sample accommodating a lot of wires and larger samples.

Applications

- Resistivity/Hall Probe Experiments
- Thermal, Electrical and Magnetic Susceptibility
- Heat Capacitance
- Seebeck Effect
- DLTS

Features

- Cryogen Free, Low Power
- Low cost aluminum construction
- Can operate in any orientation
- Fully customizable

Typical Configuration

- Cold head (DE-202AE)
- Compressor (ARS-2HW)
- 2 Helium Hoses
- Aluminum vacuum shroud with epoxied end cap (DMX-3)
- Aluminum radiation shield
- Instrumentation for temperature measurement and control:
 - 10 pin hermetic feed through
 - 36 ohm thermofoil heater
 - Silicon diode sensor curve matched to ($\pm 0.5K$) for control
 - Calibrated silicon diode sensor (± 12 mk) with 4 in. free length for accurate sample measurement.
- Wiring for electrical experiments:
 - 10 pin hermetic feed through
 - 4 copper wires
- Sample holder for electrical experiments
- Temperature Controller

Options and Upgrades

- 4K Coldhead (0.1W @ 4.2K)
- 5.5K Coldhead (1W @ 10K)
- 450K High Temperature Interface
- 800K High Temperature Interface
- Turbo upgrade for faster cooldown times
- Custom temperature sensor configuration (please contact our sales staff)
- Custom wiring configurations (please contact our sales staff)
- Window material upgrades (custom materials available)
- Sample holder upgrades (custom sample holders available)



The above picture shows a cryocooler with no vacuum shroud or radiation shield. A bulkhead with 2 SMA connectors are shown. This has the upgrade instrumentation skirt.



The above picture shows the vacuum shroud and radiation shield for the cryostat.



Non-Optical Cryostat - Economy

Cooling Technology-

DE-202	Closed Cycle Cryocooler
Refrigeration Type	Pneumatically Driven GM Cycle
Liquid Cryogen Usage	None, Cryogen Free

Temperature*-

DE-202AE	< 10K - 350K
DE-202SE	< 4.2K - 350K
DE-202PE	< 5.5K - 350K
With 800K Interface	(Base Temp + 2K) - 700K
With 450K Interface	(Base Temp + 2K) - 450K
Stability	0.1K
*Based on bare cold head with a closed radiation shield, and no additional sources of experimental or parasitic heat load	

Sample Space -

Diameter	48 mm (1.87 in.)
Height	84 mm (3.3 in.)
Sample Holder Attachment	1/4 - 28 screw
Sample Holder	www.arscryo.com/Products/SampleHolders.html

Optical Access-

Window Ports	N/A
Diameter	N/A
Clear View	N/A
#/F	N/A
Window Material	N/A

Temperature Instrumentation and Control - (Standard) -

Heater	36 ohm Thermofoil Heater anchored to the coldtip
Control Sensor	Curve Matched Silicon Diode installed on the coldtip
Sample Sensor	Calibrated Silicon Diode with free length wires
Contact ARS for other options	

Instrumentation Access-

Instrumentation Skirt	Bolt-On, Aluminum
Pump out Port	1 - NW 25
Instrumentation Ports	2
Instrumentation Wiring	Contact sales staff for options

Vacuum Shroud -

Material	Aluminum
Length	338 mm (13.3 in)
Diameter	70 mm (2.75 in) at the sample space
Width	70 mm (2.75 in) at the sample space

Radiation Shield -

Material	Aluminum
Attachment	Bolt On
Optical Access	N/A

Cryostat Footprint -


Overall Length	602 mm (23.7 in)
Motor Housing Diameter	114 mm (4.5 in)
Rotational Clearance	200 mm (8 in) with "G" Configuration

Cryocooler Model		DE-202AE		DE-202A(T)E		DE-202PE		DE-202SE	
	Frequency	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz
Base Temperature		<9K	<9K	<9K	<9K	<5.5K	<5.5K	<4.2K	<4.2K
Cooling Capacity	4.2K	-	-	-	-	-	-	0.1W	0.08W
	10K	0.5W	0.4W	0.7W	0.56W	1W	0.8W	1.2W	1W
	20K	2.5W	2W	3.7W	3W	3.5W	2.8W	4W	3.2W
	77K	4W	3.2W	6W	4.8W	3.5W	2.8W	4W	3.2W
Radiation Shield Cooling Capacity		10W	8W	15W	12W	10W	8W	10W	8W
Cooldown Time	20K	50 min	60 min	35 min	42 min	60 min	72 min	60 min	72 min
	Base Temperature	70 min	84 min	50 min	60 min	90 min	108 min	90 min	108 min
Compressor Model		ARS-2HW		ARS-2HW		ARS-2HW		ARS-4HW	
Typical Maintenance Cycle		12,000 hours		8,000 hours		12,000 hours		12,000 hours	



Non-Optical Cryostat - Economy


DE202*E-DMX-3AL Outline Drawing

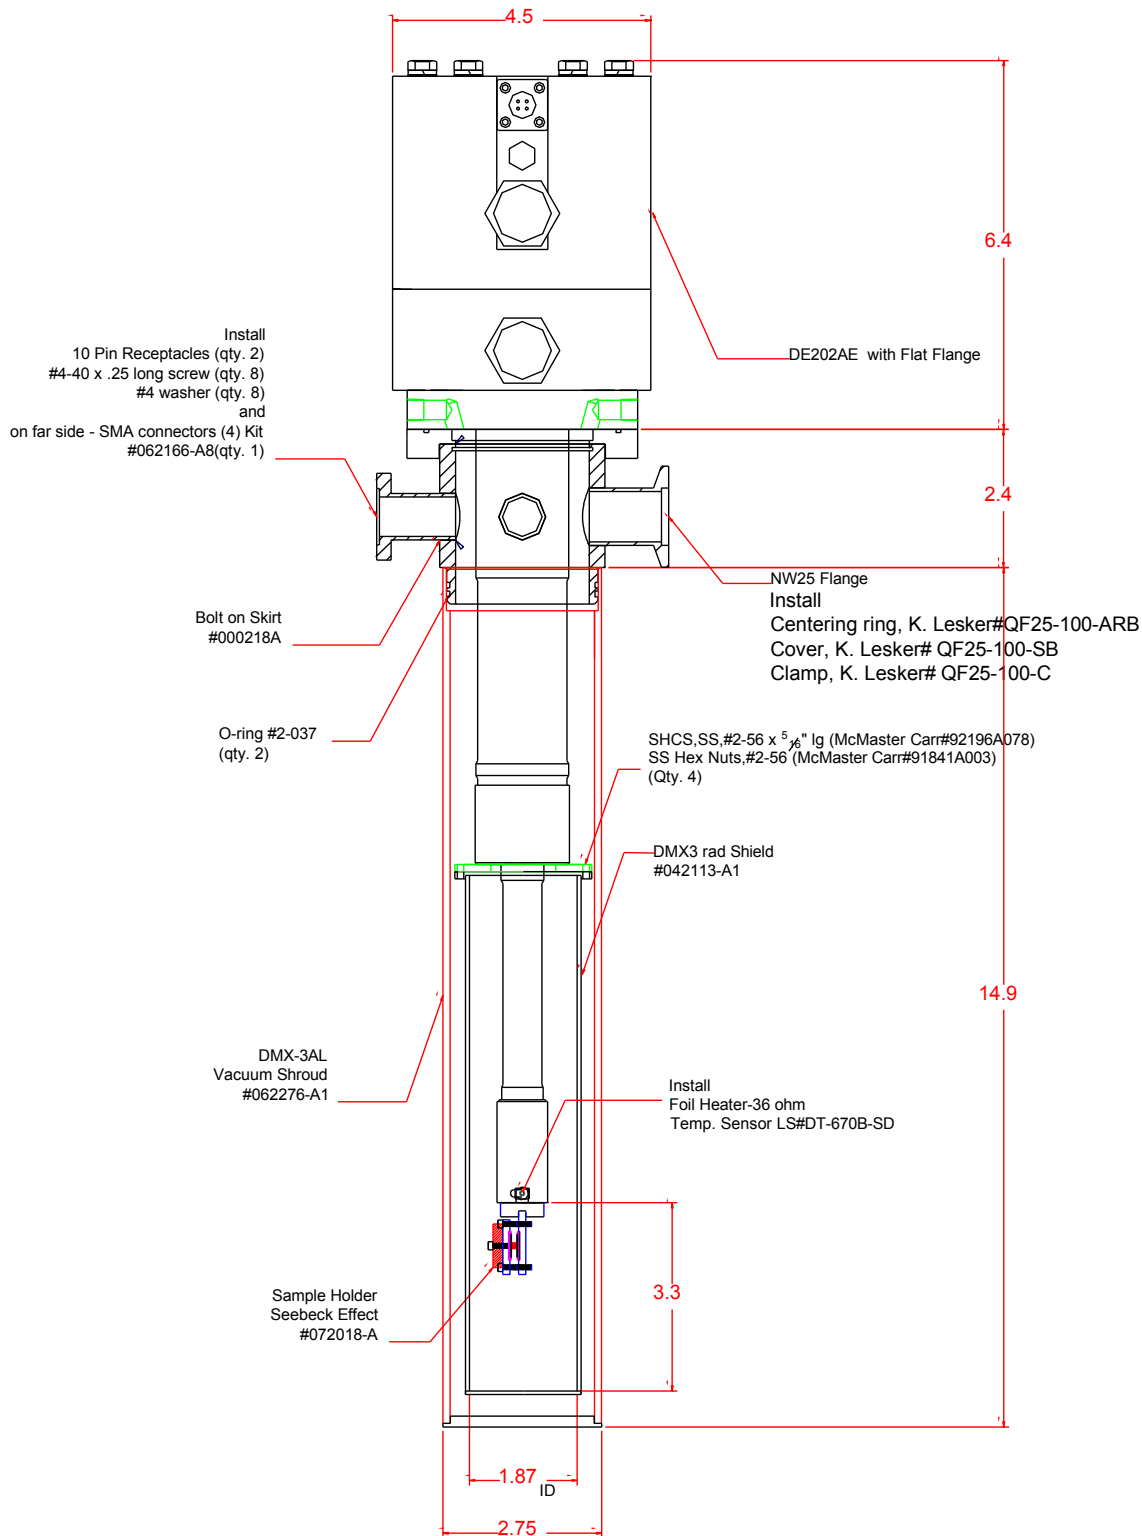




Non-Optical Cryostat - Economy

Sample Space

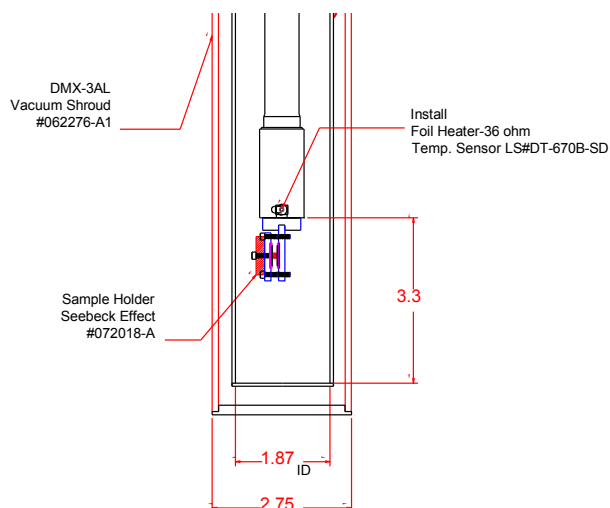

ARS-2HW/ARS-4HW Compressor

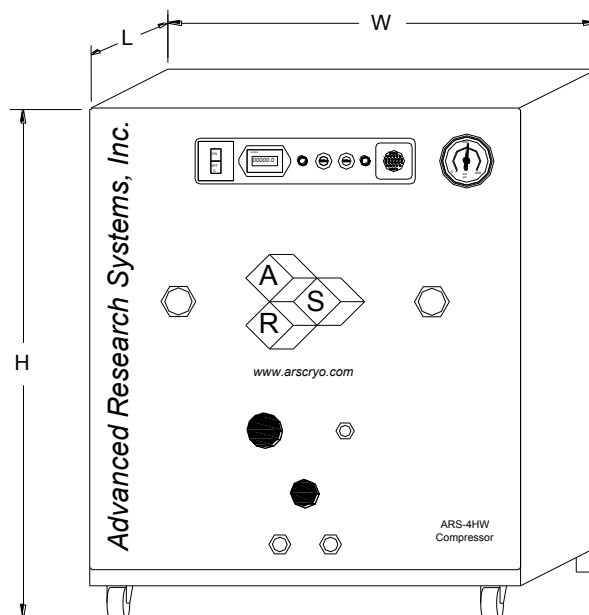

Compressor Model		ARS-2HW		ARS-4HW	
	Frequency	60 Hz	50 Hz	60 Hz	50 Hz
Standard Voltage	Min	208 V	190 V	208 V	190 V
	Max	230 V	210 V	230 V	210 V
Transformer Options	10%		220 V, 230V		220 V, 230 V
	15%		240 V		240 V
Power Usage	Single Phase	1.3 kW	1.2 kW	3.6 kW	3.0 kW
Refrigerant Gas		99.999% Helium Gas, Pre-Charged		99.999% Helium Gas, Pre-Charged	
Noise Level		60 dBA		60 dBA	
Ambient Temperature		12 - 40 C (54—104 F)			
Cooling Water	Consumption	1.5 L / min (0.4 Gal. / min)		2.3 L / min (0.6 Gal. / min)	
	Temperature	10 - 35 C (50—95 F)		10 - 35 C (50—95 F)	
	Connection	3/8 in. Swagelok Fitting		3/8 in. Swagelok Fitting	
Dimensions:	L	483 mm (19 in)		483 mm (19 in)	
	W	434 mm (17.1 in)		434 mm (17.1 in)	
	H	516 mm (20.3 in)		516 mm (20.3 in)	
Weight		62 kg (137 lbs)		72 kg (160 lbs)	
Typical Maintenance Cycle		12,000 hours		12,000 hours	
Water Recirculation Option		CoolPac Compatible		CoolPac Compatible	